

IMPROVE AIR FLOW • BLOCK BUGS • STOP FLYING DEBRIS • REDUCE HEAT • ALLOW LIGHT IN



# Mesh Screen Doors For Pest & Temperature Control

~ Perfect For Keeping Pests, Heat, Intruders & Flying Debris Out of Plant & Warehouse Space While Allowing Fresh Air In! ~



## Goff's Bug Blocking Curtain Door™



DISCOURAGE INTRUDERS • KEEP FLIES, BEES & WASPS OUT • REDUCE RISK OF WEST NILE

# PEST CONTROL AT IT'S BEST . . .

**KEEP 'EM OUT!** • Flies • Birds • Mosquitoes • Bees/Wasps  
• Intruders • Cottonwood • Leaves • Heat

## Advantages:

- Helps Meet FDA Requirements
- Significantly Reduces Heat from Sun While Allowing Light In
- 65% Shade Factor—Helps Keep Facility Cooler Longer
- Improves Ventilation — Allows Fresh Air In
- Productivity Increases with Employee Comfort
- Increases Security—Deters Trespassing, Theft & Vandalism
- Improves Building Appearance

## Industries Served:


- General Industrial
- Bottling
- Food Processing
- Wood Working
- Pharmaceutical
- Aircraft
- Defense Contractors
- Automotive
- Environmental
- Medical
- Cosmetics/Toiletries
- Chemical

## Areas of Application:

- Loading Docks
- Waste Areas
- Plant Overhead Doors
- Garages
- Food Packaging
- Process Areas




Unique "Double Baffle" Valance Panel adds an extra layer of pest protection.

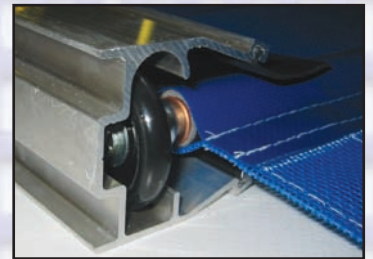

## Extrusion

- Custom Extruded Track with Reinforced Section
- Rollers are Trapped in an Extruded Cavity
- Heavy Duty Rollers Provide Smooth Operating Motion

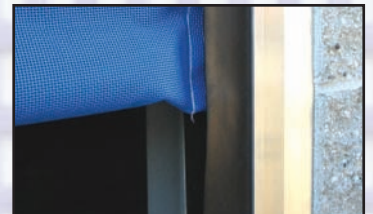

EPDM Seals on Both Sides Prevent Pest Intrusion.




## Features For Motorized & Spring Assist Models


- Double Baffle, under valance, prevents pests from entering
- Valance Panel made from 18-oz coated vinyl helps to keep debris out while protecting the roller tube
- Fiberglass Pultrusion Tube (Horizontal Stiffeners) bend if loaded – won't break or kink
- Rugged Custom Extruded Guide Track traps the rollers—wind can't blow it out of the doorframe
- Pultrusion Pockets are reinforced with 18-oz coated vinyl and double lockstitched for durability
- 17 x 11 Pre-coated Woven Polyester Mesh (11oz/yd) Screen is rot, tear and mildew resistant, standing up to the harshest of weather

## Projection Mounted Door


mounts inside the building beyond the normal security door track system. Vinyl filler panels are provided to fill space between wall and door.



Extruded Aluminum Standoff Brackets & Corner Gussets used to mount door drive and side roller tracks out from building wall beyond the normal security door.

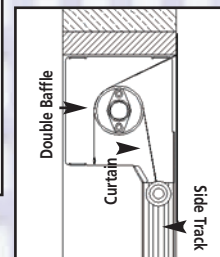

Under Header Mount attaches to the underside of doorframe.



Outside Mount attaches to opening's face.



# While Keeping Non-Air Conditioned Plant Space Cooler



Close-Up of Mesh

## Motorized Roll-Up

- Easily Controlled by Wall Mounted or Optional Remote Control Switches
- Fiberglass Pultrusion Tubes Keep Screen & Wheels in Side Track Even in Windy Environments
- Unique Vertical Aluminum Track/EPDM Seal, Assures a "BUG TIGHT" Seal
- In-Tube Motor Draws Screen Upward 6"-12" per Second (Depending on Motor Speed & Screen Size)
- Unique "Double Baffle" Valance Adds an Additional Barrier Against Debris and Pests
- Pre-Coated, Woven Vinyl Coated Mesh (VCM) Will Not Delaminate, Crack or Become Brittle Even In the Coldest Weather.



- Breakaway Feature Prevents Damage to Door or Guide Track
- Easy to Reset Back into the Track



## Spring Assist Roll-Up

- Heavy Duty Spring Within the Roller Tube Has Tension Adjustment
- Stop the Curtains Travel at Multiple Position
- Heavy Duty Handle Straps Make It Easy To Open or Close
- Fiberglass Pultrusion Tubes Keep Screen & Wheels in Side Track Even in Windy Environments
- Unique Vertical Aluminum Track / EPDM Seal, Assures a "BUG TIGHT" Seal
- Unique "Double Baffle" Valance Adds an Additional Barrier Against Debris and Pests



## Chain Hoist Operation

- Rolls Up & Down Easily
- Adjustable Stops
- Lockable



## Slide Type

- Top Valance Panel and Floor Sweep Form Seal to Provide Near Total Protection From Insects
- Fiberglass Tube Stiffens the Leading Edge
- Pliable Hem on the Leading Edge assures a Good Seal to the Jam
- 17 x 11 Pre-coated Woven Polyester Mesh (11oz/yd) Screen is Rot, Tear and Mildew Resistant, Standing Up to the Harshes of Weather



Stainless steel wall bracket with keyhole slot fastens door to jamb to prevent wind blow out. A simple lift and up motion is used to engage or disengage the door.




Provide an added level of security with this optional lock kit. Lock not included.



Optional stainless steel center cam lock assembly extends a galvanized steel pin into the floor to prevent the curtain door from bowing with wind load.

## Slide Type Mounting Hardware

- Nylon Roller Hooks Support the Curtain on 1' Centers
- 16-gauge Galvanized Steel Track



Screen compresses to small bundle when retracted.



**In Tube Motor**

- 110-Volt Operation
- Limit Switch Controls Up and Down Position
- 6"/Second Travel Speed
- Optional 12"/Second High Speed
- 40% Duty Cycle



**In Tube Spring**

- Adjustable Torque Settings
- Start-Stop at Multiple Positions



**External Mounted Motor**

- 36"/Second Travel Speed
- 4000 Cycles per Day
- 110 Volt Operation
- Chain Hoist Override



**Chain Hoist Operation**

- Start-Stop at Multiple Positions
- Lockable
- Rolls Up and Down Easily

**Sizes Available (x)**

Size W' x H'	Slide Type	Motorized	Spring Assist
8' x 8'	(x)	(x)	(x)
8' x 9'	(x)	(x)	(x)
8' x 10'	(x)	(x)	(x)
9' x 9'	(x)	(x)	(x)
9' x 10'	(x)	(x)	(x)
10' x 8'	(x)	(x)	(x)
10' x 10'	(x)	(x)	(x)
10' x 12'	(x)	(x)	(x)
10' x 14'	(x)	(x)	(x)
12' x 10'	(x)	(x)	(x)
12' x 12'	(x)	(x)	(x)
12' x 14'	(x)	(x)	(x)
14' x 14'	(x)	(x)	(x)
14' x 16'	(x)	(x)	(x)

**Operation Control Options:**



**3 Position Toggle Switch**  
(Standard for In Tube Motor)



**Handheld Remote Control**



**Nema 1 (Interior Use) Hard Wired Control**



**Nema 4 Wireless, (Indoor/Outdoor) Wall Mounted Control (or with Locking Control-not shown)**



**Nema 4 (Exterior Use) Hard Wired Control**




**Nema 4 (Exterior Use) Locking Hard Wired Control**



**Pull Cord (Indoor/Outdoor)**

**Custom Sizes Available.**

**Choose From 7 Different Colors:**

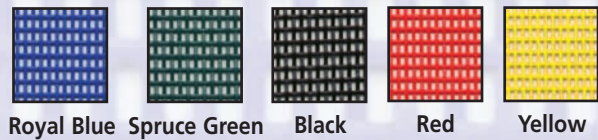

**Warranty**

3-year limited warranty on materials and workmanship. Warranty excludes electric motor and spring-assist roll-up mechanism; warranty on these items is 1 year. Goff's reserves the right to repair or replace warranty items at its discretion.

**Goff's Other Products**




Curtain Walls



High Speed DRAW-TITE Roll-Up Doors



Privacy/Security Curtains



Weldview Curtains



Weldview & Privacy/Security Screens



Strip Doors



Sound Barriers

Distributed By



Goff's Enterprises, Inc., 1228 Hickory Street, Pewaukee, WI 53072  
 e-mail: sales@goffscw.com • www.goffscurtainwalls.com  
 Phone (262) 691-4998 • 800-234-0337; Fax (262) 691-3255 • 800-959-0170  
 6.09 Copyright © 2009 Goff's Enterprises, Inc.